

PC1/IB 04 / 0 2 2 3 5

0 2 0 7 0

IB04/02235



INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 0 2 JUL 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

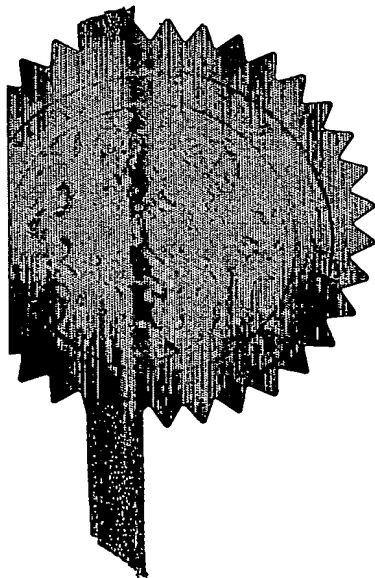

Signed

Dated 20 April 2004

THE PATENT OFFICE  
A  
Patent Office

10 JUL 2003

10JUL03 E821634-2 00179  
P01/7700 0.00-0316169.2

1/77

**Request for grant of a patent**  
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

**The Patent Office**

Cardiff Road  
Newport  
Gwent NP10 8QQ

1. Your reference PHGB 030108GBP
2. Patent application number  
(The Patent Office will fill in this part) 0316169.2
3. Full name, address and postcode of the or of each applicant (underline all surnames)  
  
Patents ADP Number (if you know it)  
  
If the applicant is a corporate body, give the country/state of its incorporation  
  
KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS  
07419294001  
  
THE NETHERLANDS
4. Title of the invention COMMUNICATION DEVICE AND AN ANTENNA THEREFOR
5. Name of your agent (if you have one)  
  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
  
Patents ADP number (if you know it)  
  
Philips Intellectual Property & Standards  
Cross Oak Lane  
Redhill  
Surrey RH1 5HA  
  
08359655001
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number  

Country	Priority Application number	Date of filing
---------	-----------------------------	----------------
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  

Number of earlier application	Date of filing (day/month/year)
-------------------------------	---------------------------------
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d)) YES

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	5
Claims(s)	3
Abstract	1
Drawings	2

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and  
search (*Patents Form 9/77*)

Request for substantive examination  
(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

*Richard Turner*

Date

*9.7.3*

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5438

A G WHITE

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## DESCRIPTION

## COMMUNICATION DEVICE AND AN ANTENNA THEREFOR

5       The present invention relates to a communications device, such as a cellular telephone, and to an antenna for use in the communication device.

      PIFAs (Planar Inverted-F Antennas) have become popular with manufacturers of cellular telephones because they exhibit a low SAR  
10   performance and they are installed above the phone circuitry within the space formed by the housing parts. Consequently they do protrude from the housing as was the case when helical antennas were used. Normally the electrical connections from the PIFA to the printed circuit board (PCB) containing the phone circuitry comprise a shorting tab and one or more feed tabs. A pressure  
15   connection is normally made either at the PCB or the interface with the antenna top plate.

      Patent Specification WO 01/37369 discloses an antenna made from sheet metal or flex film having two folded, perpendicular legs constituting a grounding (or shorting) element and a feeding element. The other ends of the  
20   legs are free and are folded-back to provide U-shaped contact areas. In use the U-shaped contact areas are juxtaposed with contact points provided on the PCB and the assembly is clamped to achieve a well defined high precision, high contact pressure. This Specification also discloses the provision of an impedance matching element extending between the legs.

25       It has been shown, Kevin Boyle, "Radiating and Balanced Mode Analysis of PIFA Shorting Pins", IEEE AP-S International Symposium and USNC/URSI National Radio Science Meeting, San Antonio, Texas, 16-21 June, Vol.4, pp. 508-511, that there are significant common and differential mode currents in the feed and shorting pins of conventional PIFAs. This puts  
30   demands on the quality of the pressure connections of the feed and shorting pins, and also leads to loss in any nearby supporting structures

Further, it has been shown by K. R. Boyle, "Differentially Slotted and Differentially Filled PIFAs", Electronics Letters Vol. 39, No.1, pp. 9-10, Jan. 2003 that the gap between the feed and shorting pins can be filled to form part of a bandwidth broadening resonant circuit. This tends to increase the circulating currents in the feed and shorting pins. The remainder of the resonant circuit, that is, a discrete capacitor, is placed on the PCB (or module). Hence the interface between the feed and shorting pins and the PCB becomes even more critical.

10       An object of the present invention is to make the interface between the feed and shorting pins and the PCB less critical.

According to a first aspect of the present invention there is provided a communications device comprising a rf circuit and an antenna, wherein the rf circuit includes coupling means for connecting the rf circuit to the antenna, the coupling means comprising an electrically conductive, self supporting member having at least one feed pillar and a shorting pillar, the pillars being substantially permanently connected to respective contact points of the rf circuit, and an antenna interface forming a pressure connection with the antenna.

20       According to a second aspect of the present invention there is provided a rf module comprising a supporting member having rf circuit components thereon and coupling means for connecting an rf output to an antenna, the coupling means comprising an electrically conductive, self supporting member having at least one feed pillar and a shorting pillar, the pillars being substantially permanently connected to respective contact points of the rf circuit, and an antenna interface for coupling to the antenna.

According to a third aspect of the present invention there is provided an antenna comprising a signal propagating and/or receiving element having at least one rf feed termination and a shorting termination, and an electrically conductive, self supporting element having at least one feed pillar and a shorting pillar to be substantially permanently connected to respective contact points of an rf circuit, and an antenna interface providing a pressure

connection with the at least one rf feed termination and the shorting termination.

The self supporting member functions to move the antenna interface such that all of the critical areas are part of the PCB or module. The self supporting member including the feed and shorting pillars is a relatively small component that is part of the rf circuit and is therefore well controlled. An advantage of the member being a self supporting component is that it does not suffer from losses associated with supporting structures. The substantially permanent connection of the pillars to the respective contact points of the rf circuit may be effected by directly soldering. This has the advantage that the soldering can be well controlled and be repeatable thus avoiding problems due to poor connections in combination with high currents. The antenna interfaces to this self supporting component at a point where differential mode currents are no longer present.

15

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a sketch of a cellular telephone having a dual band antenna connected by the self supporting component to rf circuitry on a PCB,

Figure 2 is a perspective view of the self supporting component for use with a dual band antenna, and

Figure 3 is a diagram showing one embodiment of effecting an electrical connection between the antenna and the self supporting component.

In the drawing the same reference numerals have been used to indicate corresponding features.

Referring to Figure 1, a dual standard, say GSM and DCS, cellular telephone 10 comprises a housing 12 which contains a printed circuit board 14 carrying rf, AF and other components, including a programmed microcontroller, required for the operation of the telephone 10. In the interests of brevity and clarity the mentioned other components are not shown as they are not required for an understanding of the present invention.

A dual band PIFA 16 is carried on the PCB 14 using a self supporting, electrically conductive feed component 18 and three mounting posts 20. In another non-illustrated embodiment the PIFA is supported by the back cover of the telephone 10 and abuts the feed component 18.

5 Referring to Figure 2, the component 18 may be entirely metallic, for example copper, or a metallised insulating material, for example plastics or ceramic. In the illustrated dual feed example, the component 18 comprises a middle, shorting or ground pillar 22 and outer feed pillars 24, 26 for GSM and DCS signals, respectively. In the event of the cellular telephone being a single  
10 standard telephone only one feed pillar is required.

The free ends of the pillars 22, 24, 26 are secured, for example soldered, to respective contact pads (not shown) on the part of the PCB 14 having rf components. Soldering allows standard, accurate pick and place techniques to be used. In turn this allows much more accurate and repeatable  
15 fabrication of the resonant structure.

The upper surface of the component 18 comprises an antenna interface 28. Contact with the antenna 16 is by a pressure connection. Figure 3 shows an example of the antenna having a plurality of spring contacts 30 resiliently pressing against the antenna interface 28. The large available area of the  
20 interface 28 and the lack of differential mode currents at this point improve the quality of this interface. Also interfacing at this point improves the repeatability of the antenna impedance which improves the consistency in the rf performance parameters.

In a variation of the illustrated embodiment the gap(s) 32, 34 between  
25 the feed pillars 24, 26 and the shorting pillar 22 may be filled to form part of a bandwidth broadening resonant circuit. The remainder of the resonant circuit, for example a discrete capacitor, is placed on the PCB 14. Hence the interface between the feed and shorting pillars and the PCB becomes even more critical. If required one or more resonating capacitors, for example a capacitor  
30 36 (Figure 2), may be embedded in the metalised insulating material, for example ceramic, of the component 18.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

5        From reading the present disclosure, other modifications will be  
apparent to persons skilled in the art. Such modifications may involve other  
features which are already known in the design, manufacture and use of  
communication devices and component parts therefor and which may be used  
instead of or in addition to features already described herein. Although claims  
10 have been formulated in this application to particular combinations of features,  
it should be understood that the scope of the disclosure of the present  
application also includes any novel feature or any novel combination of  
features disclosed herein either explicitly or implicitly or any generalisation  
thereof, whether or not it relates to the same invention as presently claimed in  
15 any claim and whether or not it mitigates any or all of the same technical  
problems as does the present invention. The applicants hereby give notice  
that new claims may be formulated to such features and/or combinations of  
such features during the prosecution of the present application or of any  
further application derived therefrom.



## CLAIMS

1. A communications device comprising a rf circuit and an antenna (16), wherein the rf circuit includes coupling means for connecting the rf circuit to the antenna, the coupling means comprising an electrically conductive, self supporting member (18) having at least one feed pillar (24, 26) and a shorting pillar (22), the pillars being substantially permanently connected to respective contact points of the rf circuit, and an antenna interface (28) forming a pressure connection with the antenna.
2. A device as claimed in claim 1, wherein the antenna comprises a dual band, dual feed antenna, characterised in that the self supporting member (18) has two feed pillars (24, 26) disposed one on either side of the shorting pillar (22).
3. A device as claimed in claim 1 or 2, characterised in that the self supporting member (18) is metallic.
4. A device as claimed in claim 1 or 2, characterised in that the self supporting member (18) comprises a metallised insulating material.
5. A device as claimed in claim 1 or 2, characterised in that the self supporting member (18) comprises a metallised insulating material having at least one embedded capacitor (36).
6. A device as claimed in any one of claims 1 to 5, characterised in that the antenna (16) is a PIFA.
7. A rf module comprising a supporting member (14) having rf circuit components thereon and coupling means for connecting an rf output to an antenna (16), the coupling means comprising an electrically conductive, self supporting member (18) having at least one feed pillar (24, 26) and a

shorting pillar (22), the pillars (22, 24, 26) being substantially permanently connected to respective contact points of the rf circuit, and an antenna interface (28) for coupling to the antenna.

5        8. ... A module as claimed in claim 7, wherein the antenna comprises a dual band, dual feed antenna, characterised in that the self supporting member (18) has two feed pillars (24, 26) disposed one on either side of the shorting pillar (22).

10       9.     A module as claimed in claim 7 or 8, characterised in that the self supporting member (18) is metallic.

15       10.    A module as claimed in claim 7 or 8, characterised in that the self supporting member (18) comprises a metallised insulating material.

11.    A module as claimed in claim 7 or 8, characterised in that the self supporting member (18) comprises a metallised insulating material having at least one embedded capacitor (36).

20       12.    An antenna comprising a signal propagating and/or receiving element (16) having at least one rf feed termination (26) and a shorting termination (26), and an electrically conductive, self supporting element (18) having at least one feed pillar (24, 26) and a shorting pillar (22) to be substantially permanently connected to respective contact points of an rf  
25       circuit, and an antenna interface (28) providing a pressure connection with the at least one rf feed termination and the shorting termination:

30       13.    A communications device constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

14. A rf module constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

5 15. An antenna constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

## ABSTRACT

## COMMUNICATION DEVICE AND AN ANTENNA THEREFOR

5 A communications device, such as a cellular telephone (10), comprises a rf circuit and a PIFA antenna (16) having feed and shorting terminations. An electrically conductive, self supporting member (18) is provided to effect a connection between contact points of the rf circuit and the antenna. The member (18) has at least one feed pillar (24,26) and a shorting pillar (22)  
10 which are substantially permanently connected to respective contact points of the rf circuit, and an antenna interface (28) which forms a pressure connection with the terminations of the antenna.

(Figure 1)

15

1/2.

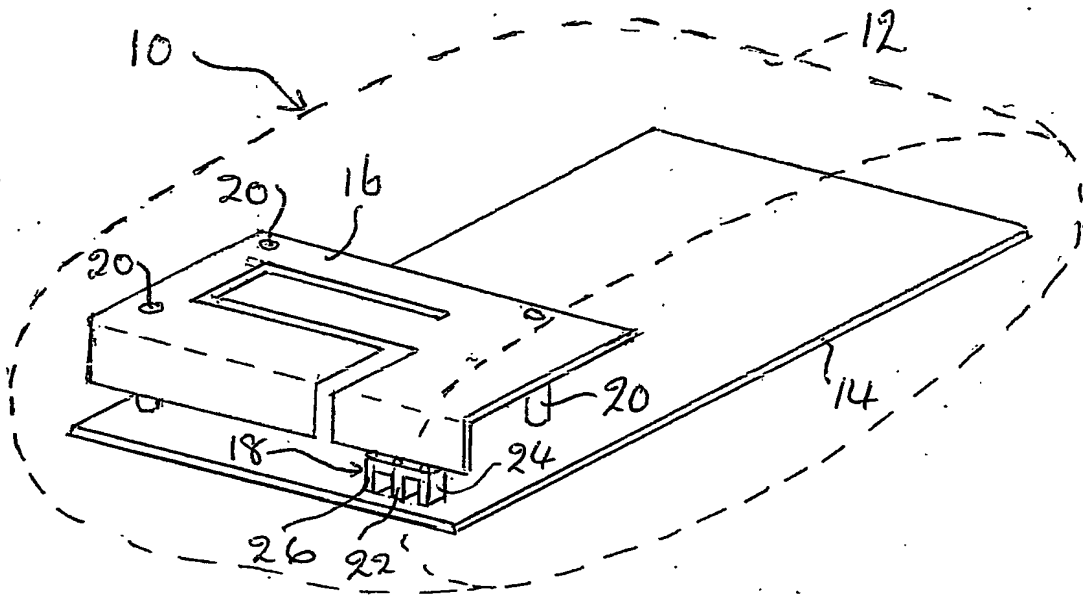


Fig. 1

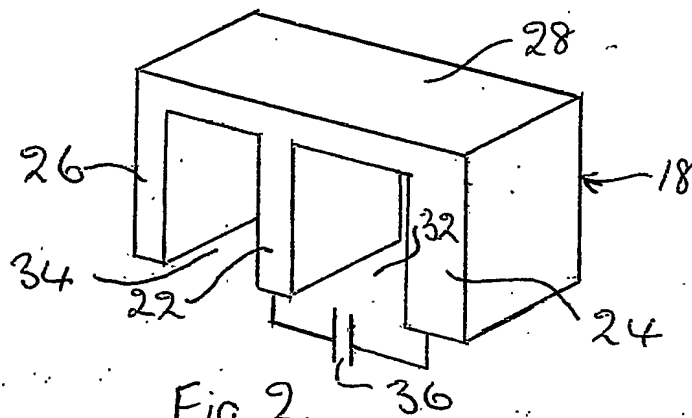


Fig. 2.

2/2

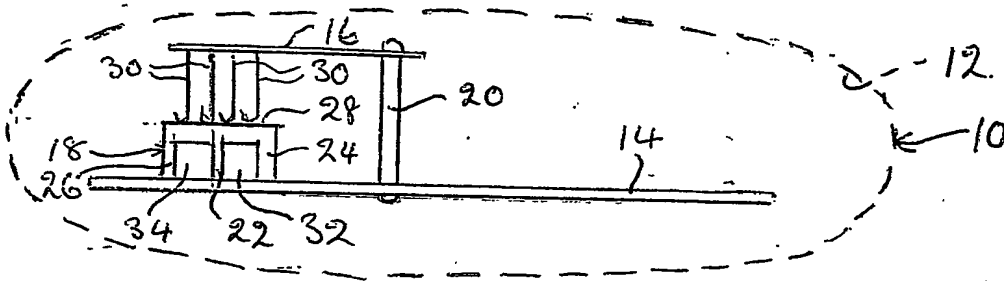


Fig. 3

**PCT/IB2004/002235**

